

REFLECT • DIFFUSE • CONTROL

Outdoor LED Area Luminaire WO-RLJD




- Applications: Roadway, parking lots, walkways and general area spaces.
- Features an ultra-durable powder topcoat, providing excellent resistance to corrosion, ultraviolet degradation and abrasion
- A precision-molded proprietary acrylic lens provides multiple photometric distributions
- Suitable for wet locations.
- Dark Sky Friendly, IDA Approved
- 10kV surge suppression protection tested in accordance with IEEE/ANSI C62.41.2.



Fixture Options

Product Code	Watts	Lumens	Lumens per Watt	Color	CRI
WO-RLJD-25	25W	3200	128 LPW	3000k, 4000k, 4500k, 5000k, 5700k	>80
WO-RLJD-50	50W	6000	120 LPW	3000k, 4000k, 4500k, 5000k, 5700k	>80
WO-RLJD-75	75W	9200	123 LPW	3000k, 4000k, 4500k, 5000k, 5700k	>80
WO-RLJD-100	100W	12000	120 LPW	3000k, 4000k, 4500k, 5000k, 5700k	>80

- Tool-less entry.
- Designed with 0-10V dimming capabilities
- Die cast aluminum housing with two-bolt bracket mounts to (1.66" or 2.38")
- Leveling adjustment from $\pm 5^\circ$

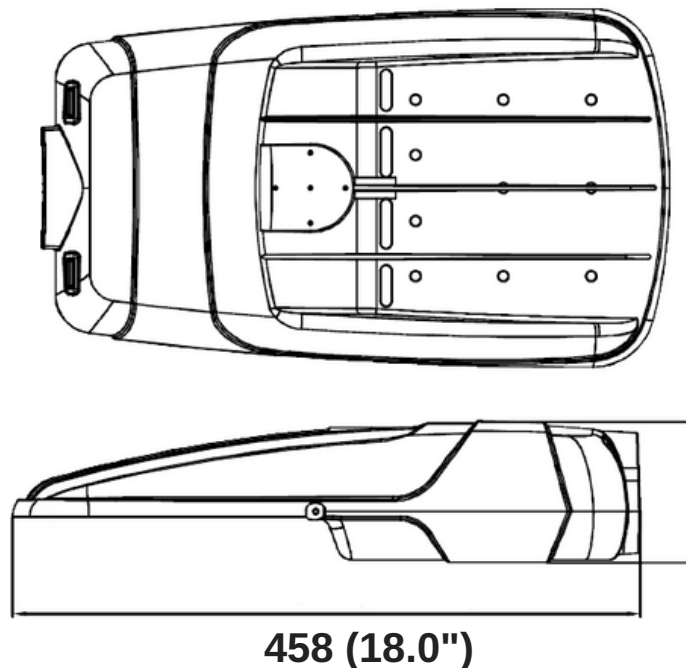

260 (10.2")

458 (18.0")

WhiteOptics LLC
243-G Quigley Blvd.
New Castle, DE 19720

302-476-2055

inquiries@whiteoptics.com
whiteoptics.com